
DIMENSIONS HAVE NOT BEEN FEILD VERIFIED PLEASE VERIFY



BRACKET LAYOUT





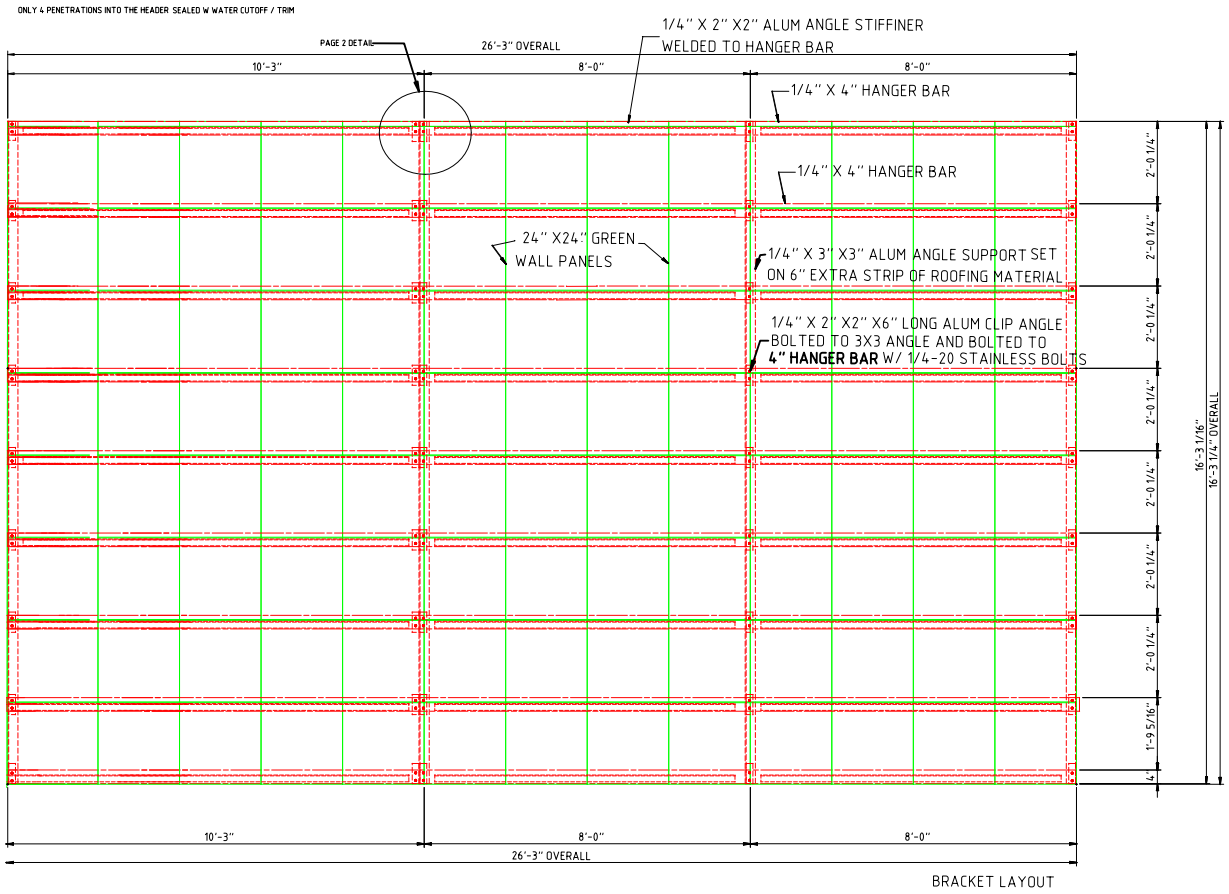


TYPICAL GREEN LIVING ROOF DETAIL
SLOPED GREEN ROOF - FLOATING BRACKET SYSTEM

SPECIFICATIONS	NOTES:
SYSTEM: GLT GREEN LIVING ROOF ASSEMBLY IRRIGATION: 17 mm SUBSURFACE DRIP WATER SUPPLY: 3/4" (19.1 mm) OR 1" (25.4 mm) PVC / POLYETHYLENE BY OTHERS CONTROLS: AUTOMATIC VALVE AND RAIN / MONITORING SENSORS	IRRIGATION OPTIONS VARY CONTACT GLT CUSTOM MANUFACTURING AVAILABLE, PLEASE CONTACT GLT - 800-631-8001 INFO@GREENLIVINGTECH.NET IRRIGATION IS INTENDED FOR SUPPLEMENTAL WATERING DURING DROUGHT CONDITIONS. VERIFY WATER SUPPLY, BACKFLOW PREVENTION, AND CONTROLLER REQUIREMENTS WITH PROJECT DESIGN TEAM. ALL ROOF PENETRATIONS AND WATERPROOFING TERMINATIONS BY APPROPRIATE TRADES.

DWG. NO.	DATE: 11/04/2026
SHEET	BY:

GREEN LIVING TECH

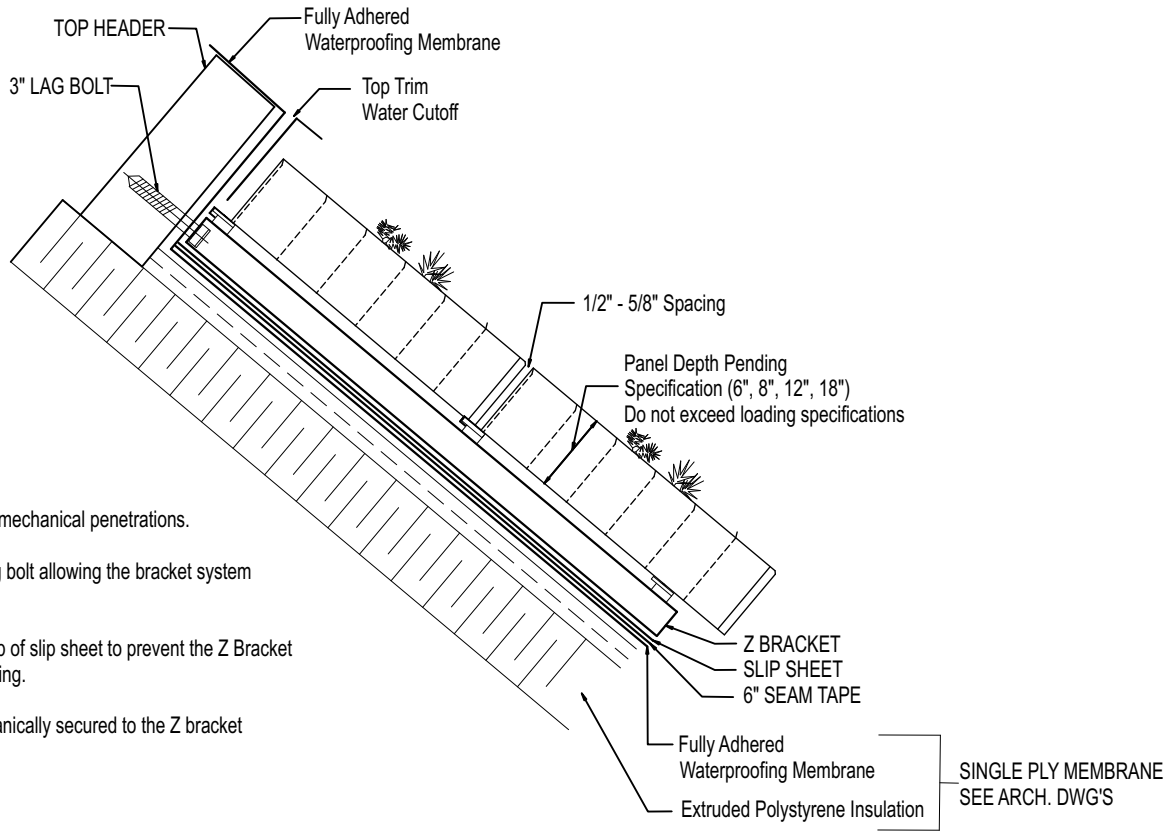

1. Lag Bolt in top header - ONLY mechanical penetrations.

2. Z Bracket is secured by the lag bolt allowing the bracket system to hang down the slope.

3. 6" EPDM seam tape and a strip of slip sheet to prevent the Z Bracket from contacting the waterproofing.

4. Horizontial brackets are mechanically secured to the Z bracket not the roof.

SIDE ELEVATION

TYPICAL GREEN LIVING ROOF DETAIL
SLOPED GREEN ROOF - FLOATING BRACKET SYSTEM

NO SCALE

SPECIFICATIONS	NOTES:
SYSTEM: GLT GREEN LIVING ROOF ASSEMBLY - SLOPED GREEN ROOF IRRIGATION: 17 mm SUBSURFACE DRIP WATER SUPPLY: 3/4" (19.1 mm) OR 1" (25.4 mm) PVC / POLYETHYLENE BY OTHERS CONTROLS: AUTOMATIC VALVE AND RAIN / MONITORING SENSORS	IRRIGATION OPTIONS VARY CONTACT GLT CUSTOM MANUFACTURING AVAILABLE, PLEASE CONTACT GLT - 800-631-8001 INFO@GREENLIVINGTECH.NET IRRIGATION IS INTENDED FOR SUPPLEMENTAL WATERING DURING DROUGHT CONDITIONS. VERIFY WATER SUPPLY, BACKFLOW PREVENTION, AND CONTROLLER REQUIREMENTS WITH PROJECT DESIGN TEAM. ALL ROOF PENETRATIONS AND WATERPROOFING TERMINATIONS BY APPROPRIATE TRADES.

DWG. NO.	DATE: 11/04/2026
SHEET 2 of 2	BY:

GREEN LIVING TECH